

ROKU® System AWM II Light


Fire resistance rating:

EI 90 / 120 / 240 according to EN 13501

Approvals:

Europe: ETA-11/0208

CR 14318, CR 14027

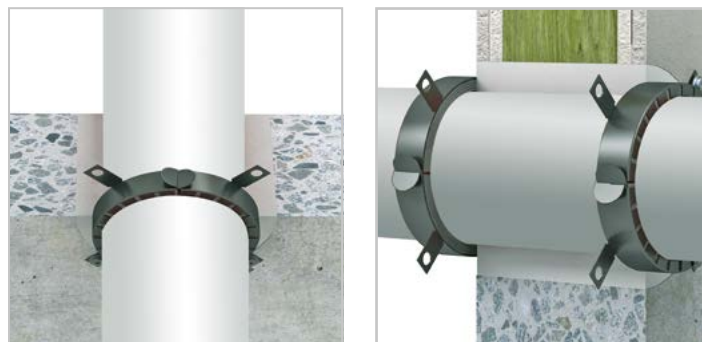

Description

The ROKU® System AWM II Light consists of a solid metal sleeve which is equipped with several layers of the high performance intumescent material „ROKU® Strip“. In the event of a fire, the intumescent material expands with high pressure and thus seals the opening hermetically against flames and smoke. For wall installations one pipe collar on each side of the wall and for floor installations one collar on the underside of the floor must be provided.

Applications

- Sealing of plastic pipes up to max. 160 mm outside diameter in solid walls, drywall partitions and solid floors

Advantages

- Very low installation height of the collar
- Suitable for the application in wet and humid areas
- Easy and excellent usability

Supplied form

AWM III fire protection collar				Accessories	
Diameter (mm)	Art.-No.	Diameter (mm)	Art.-No.	Article description	Art.-No.
32	0705300320	125	0705301250	Mounting kit Ø 32-50 mm	0707002000
40	0705300400	140	0705301400	Mounting kit Ø 63-180 mm	0707002020
50	0705300500	160	0705301600	Label	0750050060
63	0705300630				
75	0705300750				
90	0705300900				
110	0705301110				

Online



All approvals can be downloaded at

www.kuhn-brandschutz.com/systeme/roku-system-awm-iii

or via the QR-Code.

