


Sealing Mass S 5720

Product Description

The sealing mass S 5720 is a solvent-based mass to re-seal breaks and cutting edges of impregnated boards and to protect the board from external climatic influences.

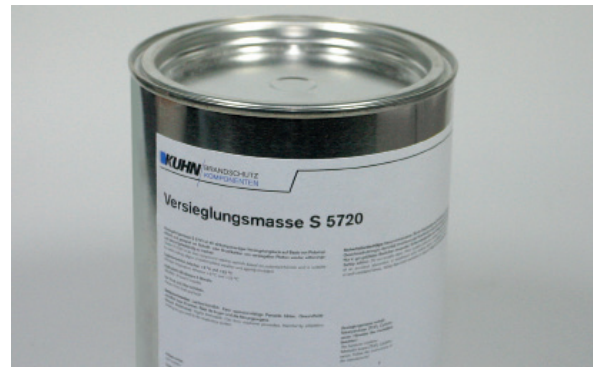

Application Areas

- Impregnation for cutting and break edges
- Partial or full-surface sealing of boards

Technical Data

Material structure:	Viscous material
Raw density [kg/m ³]:	Ca. 970
Viskosität [s]:	> 40
Initial boiling point [°C]:	66
Flash point [°C]:	Ca. - 21
Vapour pressure [mBar]:	Ca. 170
Colour:	Colourless
Odour:	Ethereal

Supplied Form

1000 ml can

Please observe our information for processing and the safety data sheet!

Processing and Storage

Processing:	Use suitable devices to apply
Storage:	Store in a dry place between + 10 °C and + 20 °C; original

*Close opened containers air-tight and use as fast as possible!
Protect from heat! Store vertically!*

Note

The information in this brochure is based on our knowledge and experience to date. This information does not release the user from carrying out independent tests and trials due to the various influences when processing and applying our product. It is not possible to derive a guarantee of certain properties or suitability of the product in a concrete application case based on our information. All the descriptions, drawings, photographs, data, conditions, weights etc. included may change without previous announcement; they do not constitute the contractually agreed property of the product. The recipient of our product is responsible to observe any trade mark rights and existing laws and regulations. Adhesive bonds are to be applied according to DIN 2304.